INTERPUMP PROCESS TECHNOLOGY

HOMOGENIZERS - COLLOIDAL MILLS - PISTON PUMPS - AGITATORS



COLLOIDAL MILL
MODEL
BMC015

BMC colloidal mills are highly efficient machines capable of processing up to 6.000 l/h of product, grinding solids and creating emulsions in applications such as plant-based foods, baby food, hummus, soups, sauces, and seaweed.

PERFORMANCES						
MODEL	INSTALLED POWER [kW – rpm]	WORKING PRESSURE (bar)	CAPACITY (l/h)	Width [mm]	Length [mm]	Height [mm]
BMC015	15 – 3000	6	6.000	650	600	1.100


TECHNICAL DATA	
Machine weight (kg)	400
Connection product inlet & outlet	DN40/DN40
Cooling water consumption l/h	60
Cooling water inlet/discharge connection	G 1/2”

Design according to MACHINE DIRECTIVES and the HARMONIZED EUROPEAN STANDARD in force.

Brand of **INTERPUMP GROUP S.p.A.**
Via G.B. Vico, 2 42124 - Reggio Emilia – Italy - Tel. +39 0522 948011 – Fax +39 0522 948080
E-mail: info@bertoli-homogenizers.com - Web: www.bertoli-homogenizers.com

INTERPUMP PROCESS TECHNOLOGY

HOMOGENIZERS - COLLOIDAL MILLS - PISTON PUMPS - AGITATORS

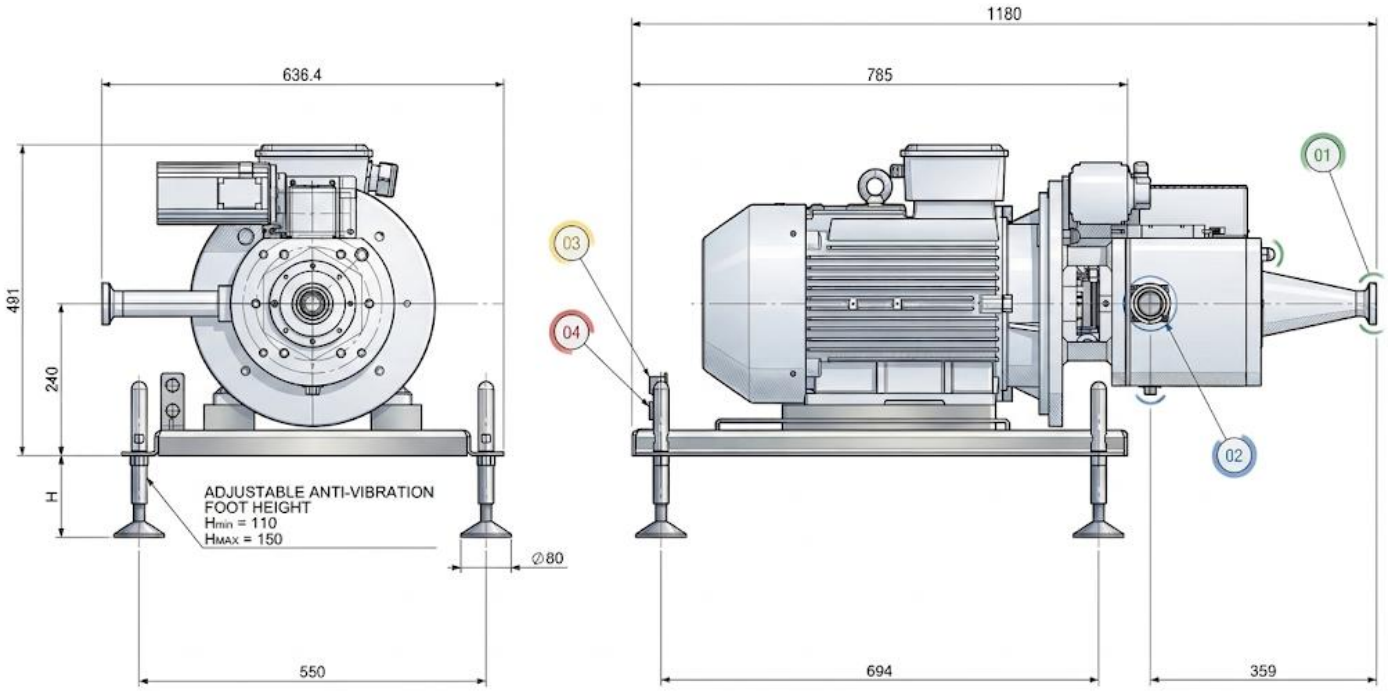

MILL CHARACTERISTICS

- AISI 630, Stainless steel rotor and stator for improved wear resistance
- Cooled Hygienic dual cartridge tungsten carbide mechanical seal, EPDM
- Connections available in Clamp BS 4825, DIN 11851
- Terminal Box
- Flow switch + solenoid valve for cooling water
- Cooled Hygienic dual cartridge tungsten carbide mechanical seal, EPDM

EXTRA FEATURES

- Stator and Rotor available in Duplex SAF2205
- Wetted parts Ra < 0.6 µm
- Electrical Power board installable inside of the machine

***Technical specifications are not mandatory and subject to change without notice.

REV1-09/26 EN

Brand of **INTERPUMP GROUP S.p.A.**
Via G.B. Vico, 2 42124 - Reggio Emilia – Italy - Tel. +39 0522 948011 – Fax +39 0522 948080
E-mail: info@bertoli-homogenizers.com - Web: www.bertoli-homogenizers.com